FIG. 1
(PRIOR ART)
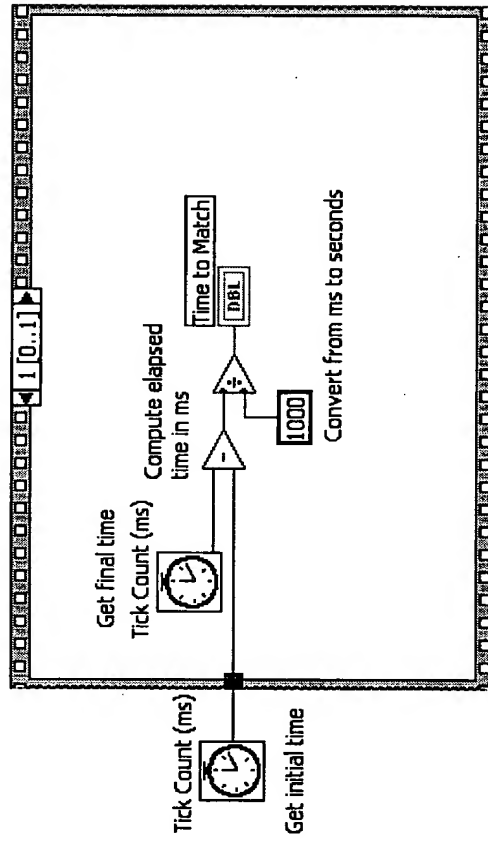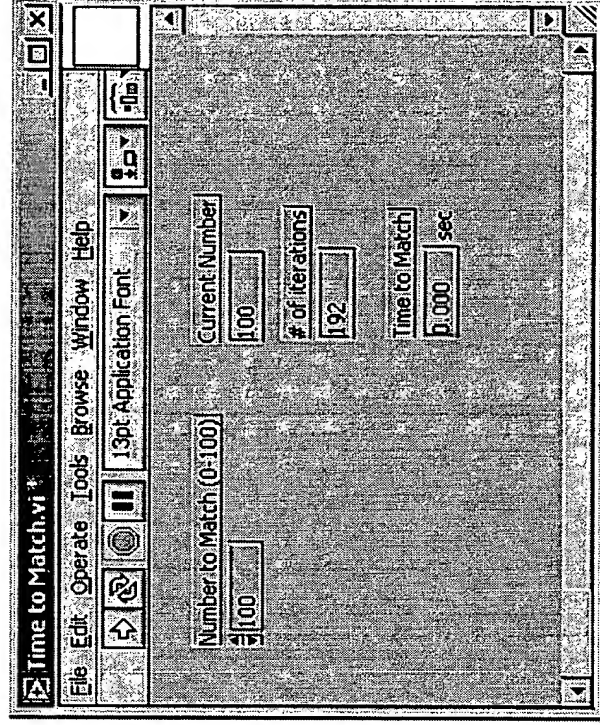
FIG. 2
(PRIOR ART)

FIG. 3
(PRIOR ART)

FIG. 4
(PRIOR ART)

FIG. 5
(PRIOR ART)

FIG. 6
(PRIOR ART)

Computer-Based
Instruments
142

Plug-In-Data
Acquisition Boards
114

100

Network

Network
Software
104

102

Computer

GPIB
122

PXI
118

VXI/VME
116

112

124

126

Signal
Conditioning

134

132

Image
Acquisition

Motion Control
136

138

Unit Under Test
150
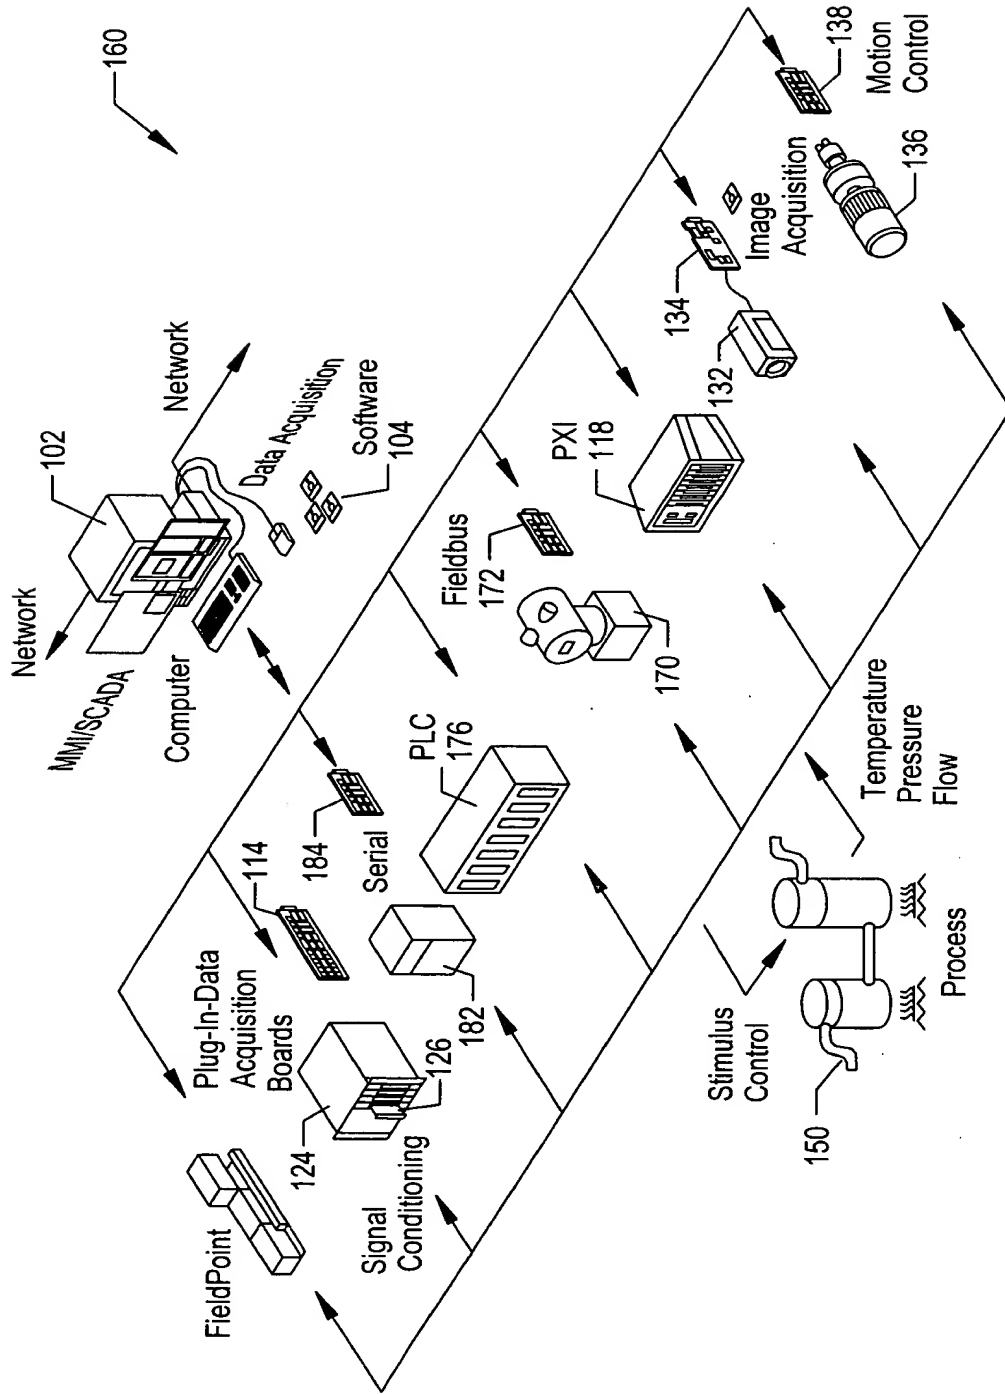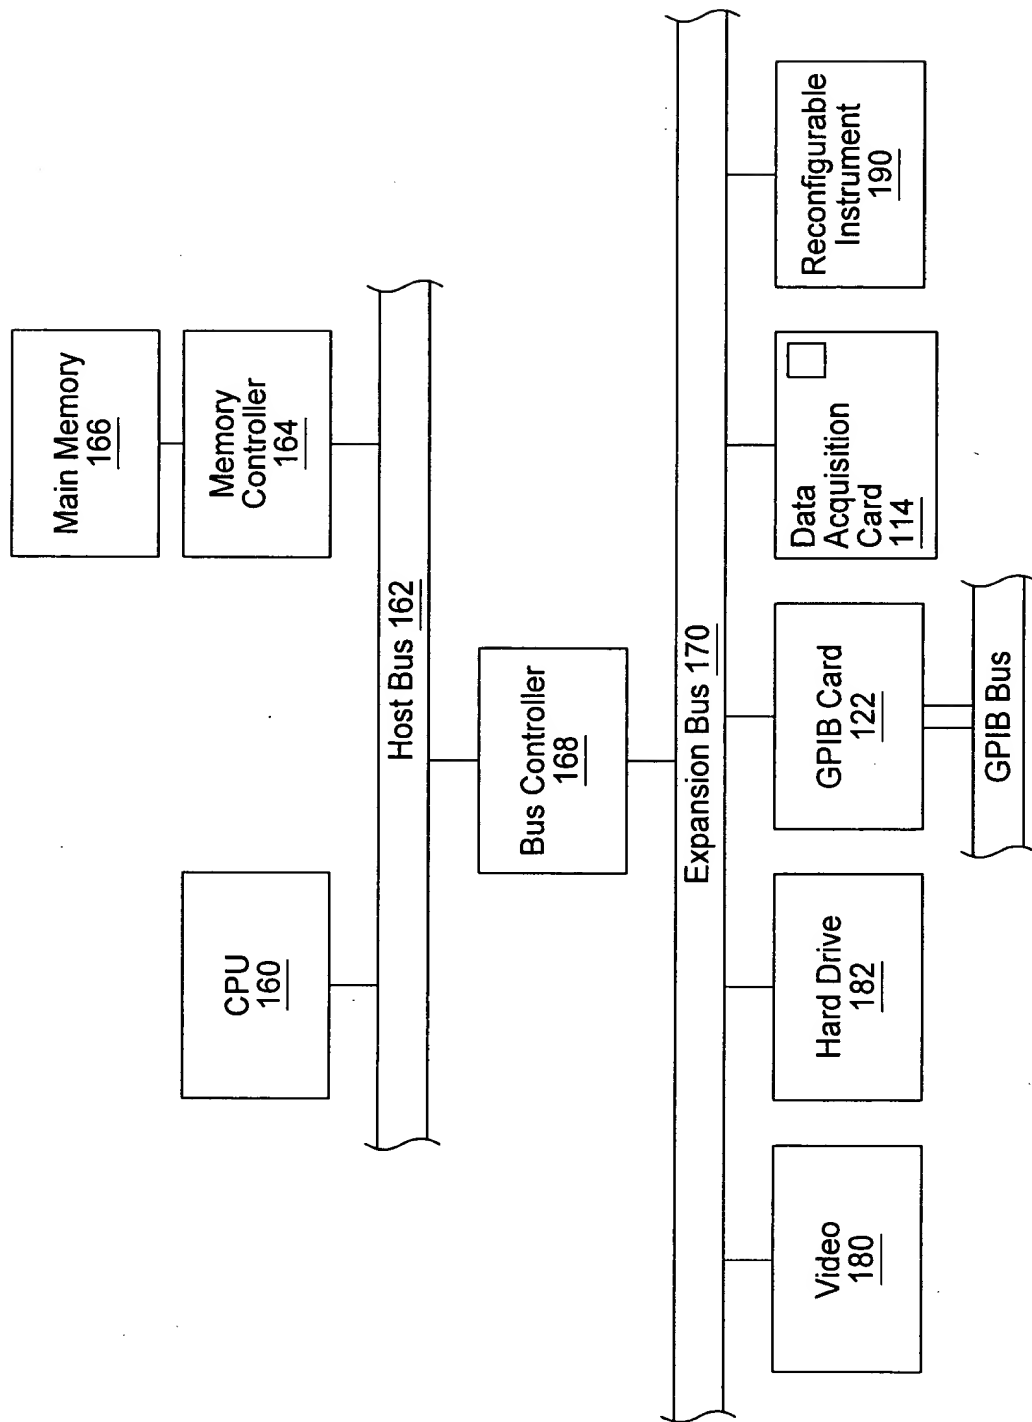
FIG. 7A

FIG. 7B

FIG. 8

Receive user input indicating a desire to specify a plurality of portions of graphical source code to be executed sequentially
200

Display a plurality of frames in the graphical program such that two or more frames are visible at the same time
202

Include a portion of graphical source code in each frame in response to user input, wherein the plurality of frames define an execution order for the plurality of portions of graphical source code such that during execution of the graphical program the plurality of portions of graphical source code are executed sequentially
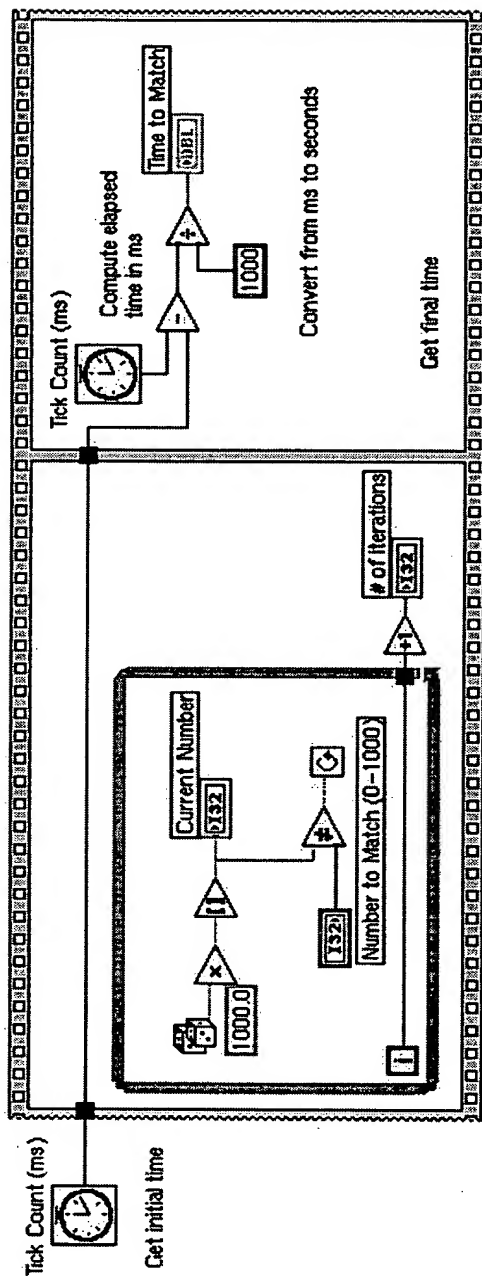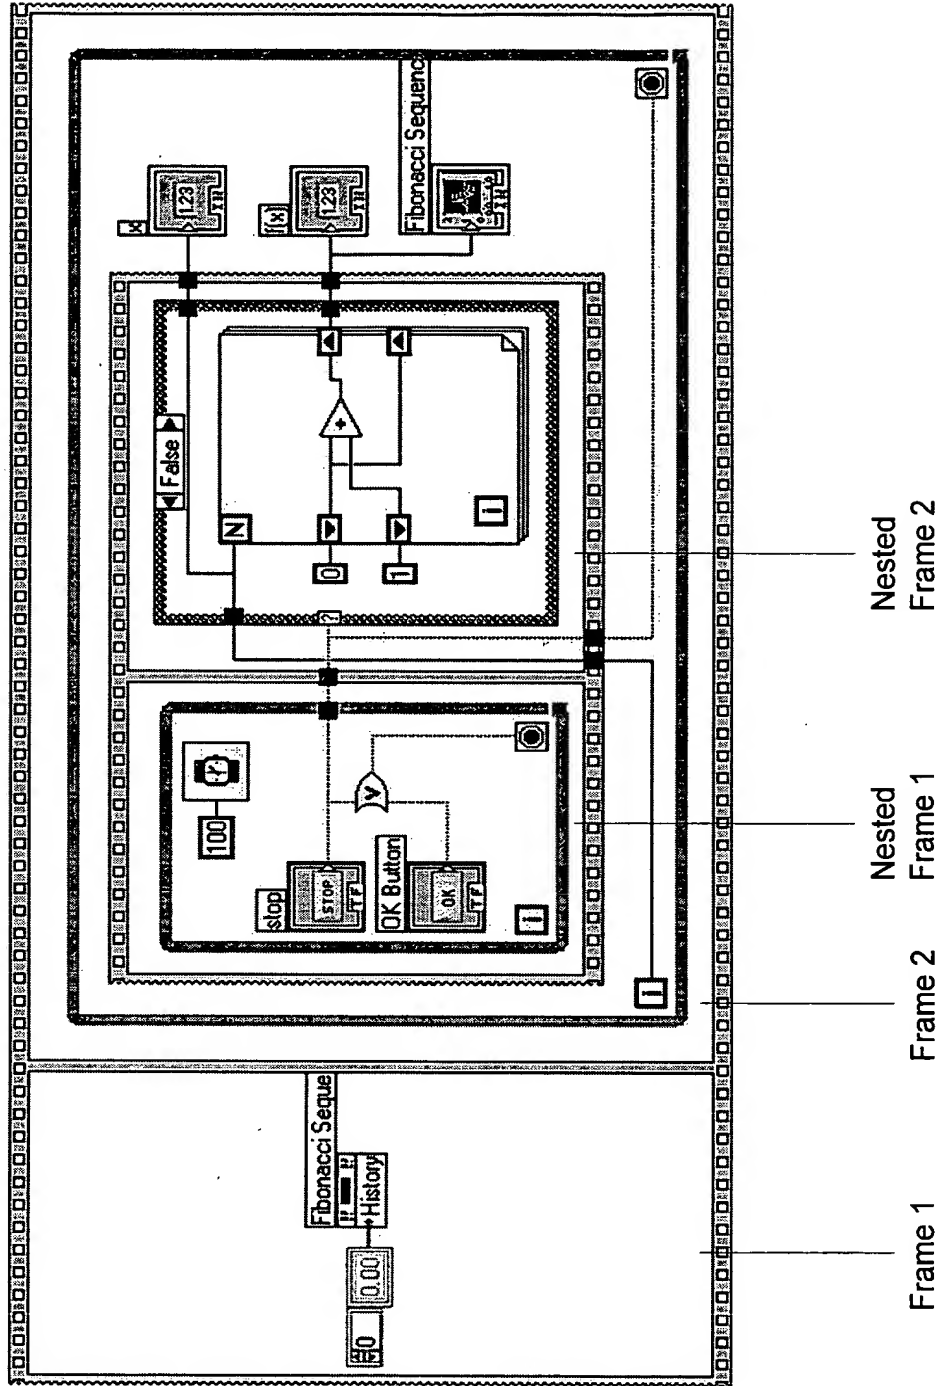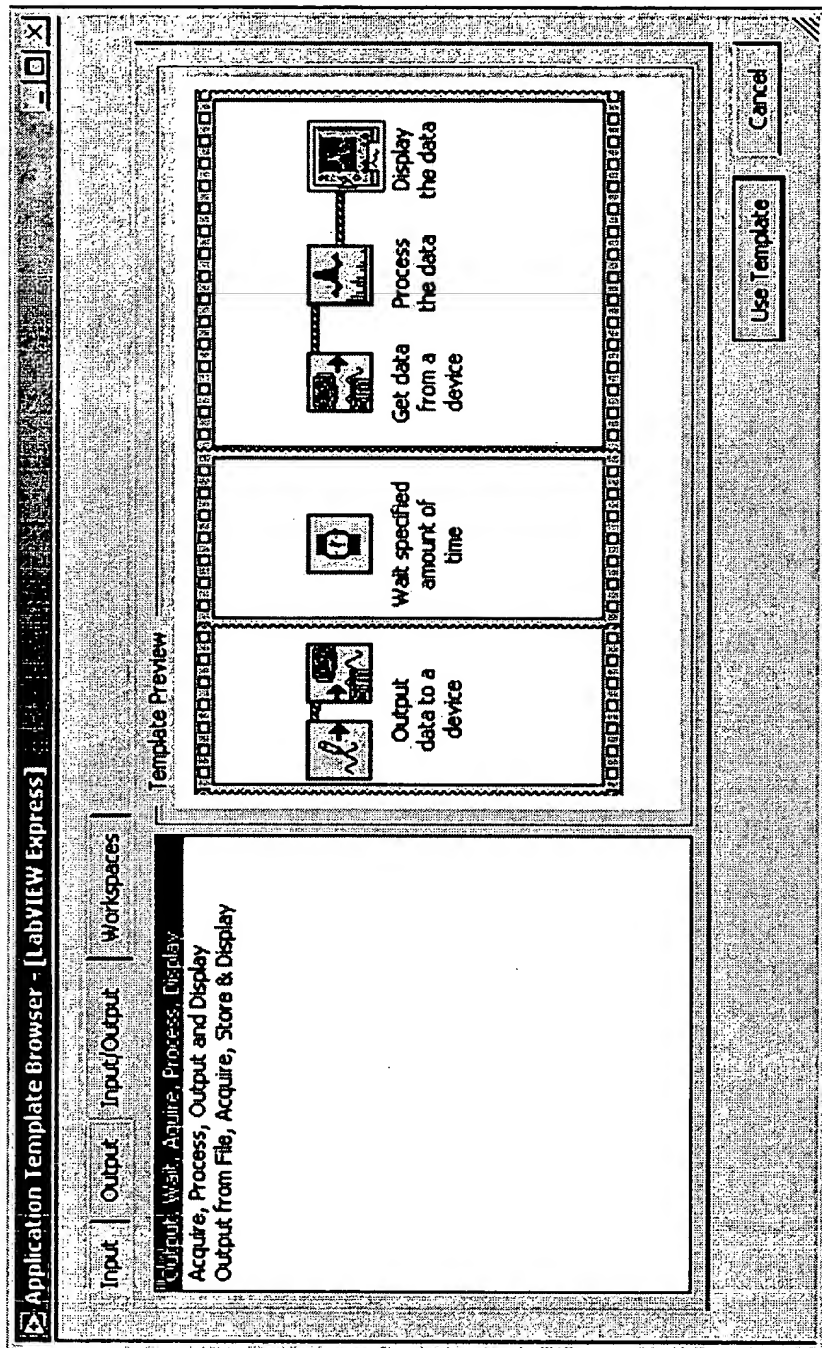204

FIG. 9

FIG. 10

FIG. 11

FIG. 12